

Albertine Pro

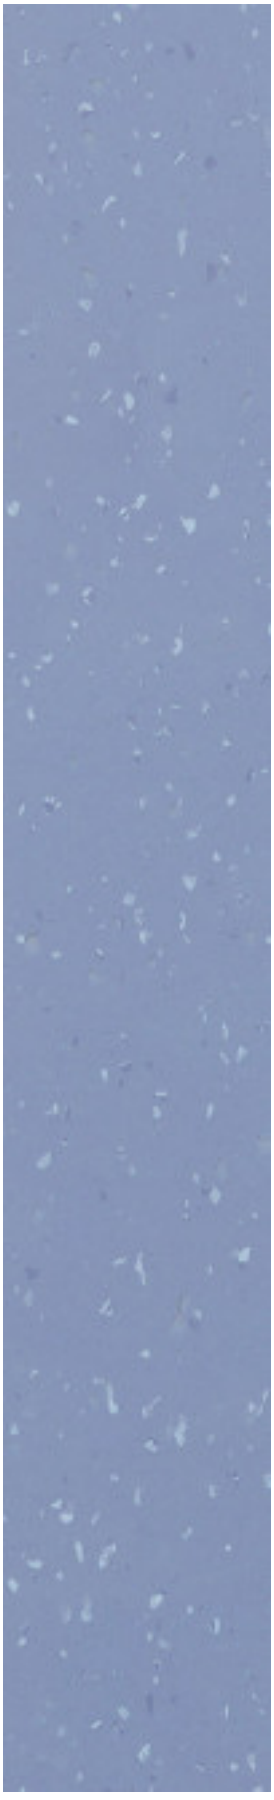

100

Polar Mist



415

Urban Blush



710

Silver Drift




725

Concrete Dusk



730

Metro Grey



780

Graphite Edge



805

Steel Sky

Specifications and colourations are subject to manufacturing tolerances. As part of the Godfrey Hirst continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

Albertine Pro

Albertine Pro from Godfrey Hirst brings simple, **contemporary style together with dependable everyday performance**. Its subtle surface detail and natural, easy-going aesthetic create a calm foundation that complements a wide range of interior styles without overwhelming the space.

Designed for both residential and more demanding environments, Albertine Pro offers durable performance for areas where flooring needs to stand up to everyday use. Its **comfortable underfoot feel adds a sense of ease, while the easy-care surface keeps maintenance simple and practical**.

The clean, versatile appearance of vinyl sheet flooring creates a cohesive look across the space, making Albertine Pro an adaptable choice for a variety of interiors. Combining understated design with reliable performance and everyday practicality, it is** a smart foundation for spaces designed to be lived in**.

Technical Data

Type:	Vinyl Sheet Flooring
Wear Layer:	2mm
Finish:	Matte

Total Product Thickness:	2mm
Colours:	7
Installation Method:	Direct Stick

Performance

Dimensional Stability:	(ISO 23999) norm ≤ 0,40%
Impact Sound Reduction:	Please refer to Godfrey Hirst Acoustic Performance specification sheet
Flammability:	(EN ISO 9239) CRF 10.8W/m2
Slip Resistance:	(AS 4586) P2, R9

Abrasion Rating:	(EN 660-2) Group T
Light Fastness:	(EN ISO 105-B02) ≥6
Smoke Value:	Direct Stick: (EN ISO 9239) 32%.minutes

Sustainability

Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits



Heavy Traffic



Affordable



European Made