


Albertine PUR



150
Brooke

PTS: All-over




300
Mackenzie

PTS: All-over




700
Monroe

PTS: All-over



720
Avery

PTS: All-over



740
Sinclair

PTS: All-over



790
Dakota

PTS: All-over



Albertine PUR

Albertine PUR offers robust vinyl flooring designed to tackle heavy foot traffic effortlessly. Featuring a unique homogeneous structure with built-in polyurethane, it resists scuffs, dents, and gouges, ensuring low maintenance. The jaspe finish showcases a vibrant multi-colored chip pattern that resembles gravel with a speckled surface, adding a dynamic touch to any space. Perfect for high-traffic areas like hospitals, aged care facilities, educational institutions, and industrial settings, Albertine PUR combines durability with eye-catching aesthetics.

Technical Data


Type:	Vinyl Sheet Flooring	Total Product Thickness:	2mm
Roll Width:	Width: 2m, Length: 20m	Colours:	6
Country of Origin:	China	Finish:	Matte
Coating System:	Platinum PUR	Installation Method:	Direct Stick

Performance

Dimensional Stability:	(ISO 23999) norm $\leq 0,40\%$	Thermal Resistance:	(EN ISO 12667) 0,012 m ² .K/W
Classification:	(EN ISO 10874) Residential 23, Commercial 34, Industrial 43	Abrasion Rating:	(EN 660-2) Group T
E3 Internal Moisture:	3.0 Watersplash - Acceptable solution	Suitable for Wet Areas:	All wet areas - subject to proper installation and maintenance
Impact Sound Reduction:	(EN ISO 717-2) $\Delta L_w = 4\text{dB}$	Light Fastness:	ISO 105 B-02 \geq grade 6
Light Reflectance Values:	150 - 69.33 700 - 54.17 720 - 56.87 740 - 46.67 300 - 46.57 790 - 21.94	Flammability:	Direct Stick: (EN ISO 9239) 10.8 kW/m ² - 32%.min
Smoke Value:	EN ISO 9239: 32% min	Slip Resistance:	(AS/NZ 4586-2013) P2, R9
Castor Chair:	(EN ISO 4918) Suitable	Residual Indentation:	(EN ISO 24343-1) $\geq 0.10\text{mm}$

Sustainability

Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	(ASTM D5116-2017) Pass

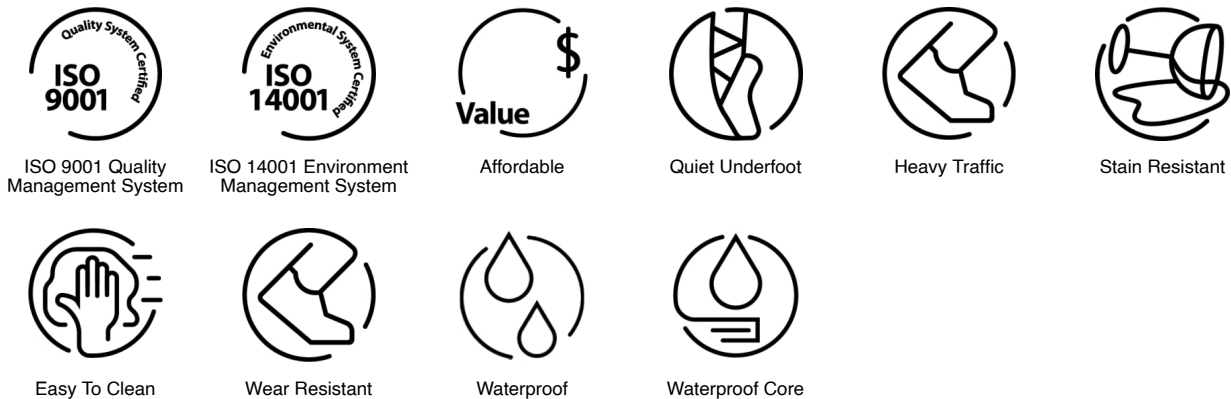

Albertine PUR

Albertine PUR

Manufacturing Standards:

All specifications and colours are subject to manufacturing tolerances and may be changed or discontinued without notice. Product images are for reference only; actual colours may vary from samples due to printing variations, batch differences, and lighting conditions. All variations are within industry standards.

Natural Product Characteristics:

Hard flooring products may display natural variations in colour, grain, texture, and pattern between batches and individual planks or tiles. These variations are inherent characteristics of the product and do not constitute a manufacturing defect.

Water Resistant/Waterproof Flooring:

Water resistance and waterproof performance are subject to proper installation, ongoing maintenance, and compliance with local building codes and regulatory requirements.

Installation:

All hard flooring must be installed by a qualified professional in accordance with NZS AS 1884:2013, relevant referenced standards for moisture testing and subfloor preparation (e.g. AS/NZS 1080 where applicable), recognised industry best practice, and the applicable Godfrey Hirst installation instructions. Proper subfloor preparation, moisture management, and acclimatisation are essential to ensure product performance and longevity.

Maintenance:

Maintenance requirements vary by product type. Refer to the specific care and maintenance guidelines for your flooring product to ensure optimal performance and longevity.

Product-Specific Notes:

Timber: Nested/random lengths may occur. As this is a natural product, some boxes may include one 'nested' board (i.e. two boards comprising the quoted board length). All boxes will provide the coverage quoted.

Vinyl Sheet: Each colour has a specific pattern repeat and laying direction, refer to the Product Specification Sheet for details. Pay particular attention to the directional arrow to determine if the design should be installed in a standard or reverse direction. LRV indicates Light Reflectance Value, PR is Pattern Repeat, and PTS denotes Plank/Tile Size.

Warranty:

All Godfrey Hirst floors carry a comprehensive warranty supported by New Zealand after-sales service. As a New Zealand manufacturer, we recognise all consumer rights under the Consumer Guarantees Act 1993 and match any equivalent performance guarantee offered in the marketplace at the time of purchase. Commercial warranties are issued project-by-project with specific terms and conditions.

For detailed warranty information, installation guidelines, care instructions, and product characteristics, visit www.godfreyhirst.com or call 09 268 3300. For commercial project-specific warranty enquiries, contact your GH Commercial Account Manager.

Test results and certificates available on request.