

Isafe 70



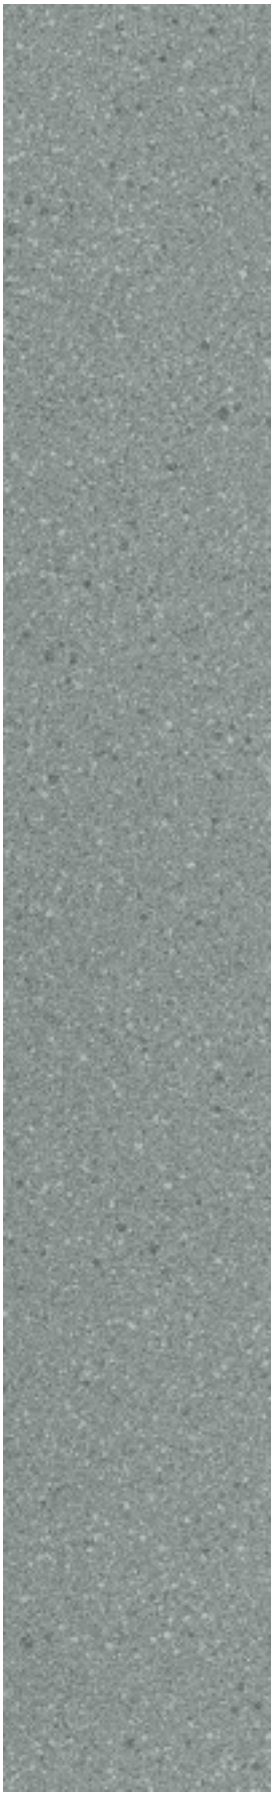

523

Light Green




531

Sand



577

Steel Blue



594

Gainsboro Grey



597

Dim Grey



599

Ink

Specifications and colourations are subject to manufacturing tolerances. As part of the Godfrey Hirst continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

Isafe 70

Bring confidence, durability and dependable performance to commercial environments with Isafe 70 heterogeneous vinyl sheet flooring from Godfrey Hirst. Designed for busy spaces where safety and practicality are essential, Isafe 70 combines a resilient construction with reliable slip resistance to deliver a functional flooring solution for commercial applications.

Engineered to provide reliable P4 slip resistance in both wet and dry conditions, Isafe 70 features a permanent, built-in HyperGrip+ performance barrier. This integrated technology provides lasting slip resistance, helping support safer environments where floor performance is critical.

Designed to withstand the demands of heavy commercial traffic, Isafe 70 features a tough wear layer that delivers durable everyday performance. Sanitec treatment also helps support hygiene, making it a practical choice for environments where cleanliness and durability are important. Combining built-in slip resistance, robust construction and hygiene-supporting treatment, **Isafe 70 delivers dependable performance and added confidence for demanding commercial spaces.**

Technical Data

Type:	Vinyl Sheet Flooring
Wear Layer:	0.7mm
Colours:	6
Finish:	Matte
Coating System:	HyperGrip+ Performance Barrier

Total Product Thickness:	2.15mm
Roll Width:	Width: 2m, Length: 20mm
Country of Origin:	Belgium
Surface:	Embossed
Installation Method:	Direct Stick

Performance

Impact Sound Reduction:	Please refer to Godfrey Hirst Acoustic Performance specification sheet
Smoke Value:	Direct Stick: (EN ISO 9239) 146% minutes

Flammability:	(EN ISO 9239) CRF 7.4W/m2
Slip Resistance:	P4

Sustainability

Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits



Heterogenous Vinyl Sheet



HyperGrip+



Sanitec


Heavy Traffic


Strong & Durable


Water Resistant

Isafe 70



Affordable



Direct Stick



ISO 9001 Quality Management System



ISO 14001 Environment Management System

Isafe 70

All GH Commercial vinyl sheet products must be installed in accordance with relevant Australian Standards and in conjunction with the GH Commercial Vinyl Sheel Installation Instructions.

*Terms and conditions apply to all commercial warranties - contact your GH Commercial Account Manager.

^Subject to proper installation, maintenance and local building code/regulatory approval.