
Sandstone R10






300

Pumice

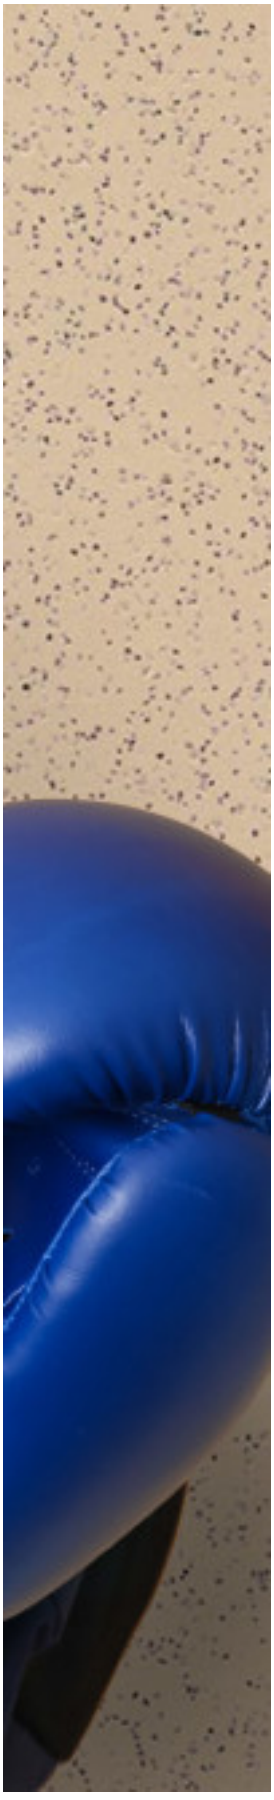

500

Quartz



760

Ironsand



790

Coal

Specifications and colourations are subject to manufacturing tolerances. As part of the Godfrey Hirst continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.

Sandstone R10

Sandstone R10 from Godfrey Hirst brings the **understated character of stone into a practical vinyl sheet flooring format**. Its soft movement and subtle tonal variation create a calm, contemporary backdrop that complements a wide range of interior styles, from relaxed residential spaces to more design-led environments.

Designed with everyday living in mind, Sandstone R10 combines a comfortable underfoot feel with a durable, stain resistant surface that is easy to clean and maintain. Its resilient construction is** suited to heavy traffic areas, providing dependable performance where floors need to work hard while maintaining a polished appearance**.

The seamless look of vinyl sheet flooring creates a clean, cohesive finish across the space, while direct stick installation provides a secure, professional result. Offering **an accessible flooring solution without compromising on style or everyday practicality**, Sandstone R10 is a versatile choice for interiors that need to feel both comfortable and considered. It is also compliant with Green Building Council of Australia VOC emission standards.

Technical Data

Type:	Vinyl Sheet Flooring
Wear Layer:	2mm
Colours:	4
Installation Method:	Direct Stick

Total Product Thickness:	2mm
Roll Width:	Width: 2m, Length: 20m
Finish:	Matte

Performance

Dimensional Stability:	(ISO 23999) norm ≤ 0,40%
Impact Sound Reduction:	Please refer to Godfrey Hirst Acoustic Performance specification sheet
Flammability:	(EN ISO 9239) CRF 9.8W/m2
Slip Resistance:	(AS 4586) P3, R10

Classification:	(EN ISO 10874) Residential 23, Commercial 34, Industrial 43
Light Fastness:	(EN ISO 105-B02) ≥6
Smoke Value:	Direct Stick: (EN ISO 9239) 60%.minutes

Sustainability

Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits


Heavy Traffic



Affordable



European Made