



## Installation Instructions




### GHF Scotia – 15mm

- Suitable for all Godfrey Hirst hybrid and laminate floors.
- Construction allows for successful pinning/nailing without splitting.
- Pin or use construction adhesive to fix to wall/vertical surface, never to floor.
- Use glue only to fix to aluminium window/door reveals.
- Leave minimum 6-10mm expansion gap.
- Also available: GHF SCOTIA 19mm in MDF for laminate floors (note: not water resistant).

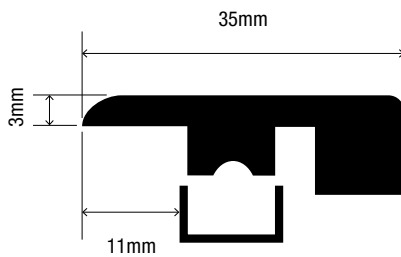

### GHF End Cap – 35mm

- Suitable for all Godfrey Hirst hybrid floors with a finished height of 5-6mm.
- Allows for easy installation through multiple doorways, passages etc.
- Ideal for finishing next to aluminium window/door reveals.
- Use U-Channel to adjust/set finished trim height.
- Glue U-Channel to subfloor with construction adhesive.
- End cap can be glued direct to subfloor with construction adhesive.
- Leave minimum 6-10mm expansion gap.

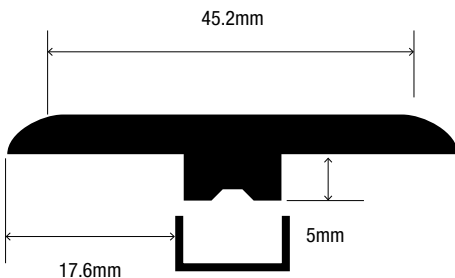


### GHF T.Mould – 45mm

- Suitable for all Godfrey Hirst hybrid floors with a finished height of 5-6mm.
- Use to cover and finish expansion gaps between the same or different flooring of the same height.
- Use U-Channel to adjust/set finished trim height.
- Glue U-Channel to subfloor with construction adhesive.
- Leave minimum 6-10mm expansion gap.

# Water Resistant Accessories

Australian Edition

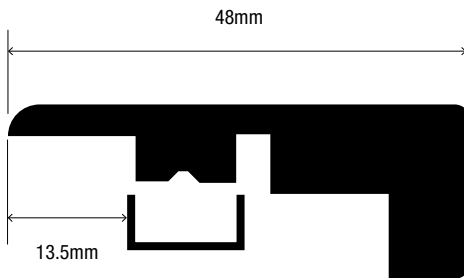

## GHF Stair Nosing – 48mm

- Suitable for all Godfrey Hirst hybrid floors with a finished height of 5-6mm.
- P3 slip resistant finish complies with NCC/BCA for internal stairs.
- Use U-Channel to adjust/set finished trim height.
- Stair nosing can be glued direct to subfloor with construction adhesive.
- Can be glued direct to subfloor with construction adhesive.
- Leave minimum 6-10mm expansion gap for landings.
- All treads/risers to be glued to base using hard-set vinyl adhesive.



## GHF Alum Channel

- Aluminium U-Channel can be used with the above accessories to make them suitable for Godfrey Hirst laminate floors with a finished height of 7-10mm.
- Recommended for high traffic areas.
- Can be glued or screwed to the subfloor.

### Notes:

1. Subfloor must be clean, dry and dust free to ensure correct adhesive bond with channel and/or trim.
2. Ensure channels are seated well into the adhesive bed.
3. The plastic U-Channel is designed to adjust the height of the trim to allow the correct expansion gap without clamping the trim to the flooring. Construction adhesive must be applied correctly to provide strength to the installation.
4. Ensure correct minimum expansion gap is maintained prior to fitting trim.
5. Adhesive overflow on flooring side of channel may need trimming back to ensure correct expansion gap.
6. All trims can be cut with a hacksaw or similar.
7. Never fix any trims directly to Godfrey Hirst hybrid or laminate floors and ensure fixing does not compromise expansion gaps.
8. Please note that colours 100 Ice, 170 Umber, 540 Pampus, 550 Spirit, 570 Fumed and 720 Reclaimed Oak feature a visual design effect. These colours will have tonal variation amid the trims for a natural timber look.